


**FEATURES**

- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance



Marking Code: A7  
SOT-23 Plastic Package


**Absolute Maximum Ratings (T<sub>a</sub> = 25 °C)**

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	85	V
Continuous Reverse Voltage	V <sub>R</sub>	75	V
Continuous Forward Current (Double Diode Loaded)	I <sub>F</sub>	125	mA
Continuous Forward Current (Single Diode Loaded)	I <sub>F</sub>	215	mA
Repetitive Peak Forward Current	I <sub>FRM</sub>	450	mA
Non-repetitive Peak Forward Surge Current	I <sub>FSM</sub>	0.5 1 4.5	A
		at t = 1 s	
		at t = 1 ms	
		at t = 1 μs	
Power Dissipation	P <sub>tot</sub>	350	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature Range	T <sub>stg</sub>	- 65 to + 150	°C


**Characteristics at T<sub>a</sub> = 25 °C**

Parameter	Symbol	Max.	Unit
Forward Voltage at I <sub>F</sub> = 1 mA	V <sub>F</sub>	0.715	V
at I <sub>F</sub> = 10 mA		0.855	
at I <sub>F</sub> = 50 mA		1	
at I <sub>F</sub> = 150 mA		1.25	
Reverse Current at V <sub>R</sub> = 25 V	I <sub>R</sub>	30	nA
at V <sub>R</sub> = 75 V		1	μA
at V <sub>R</sub> = 25 V, T <sub>j</sub> = 150 °C		30	μA
at V <sub>R</sub> = 75 V, T <sub>j</sub> = 150 °C		50	μA
Diode Capacitance at V <sub>R</sub> = 0 , f = 1 MHz	C <sub>d</sub>	1.5	pF
Reverse Recovery Time at I <sub>F</sub> = I <sub>R</sub> = 10 mA, I <sub>R</sub> = 1 mA, R <sub>L</sub> = 100 Ω	t <sub>rr</sub>	4	ns


**Typical Characteristics**

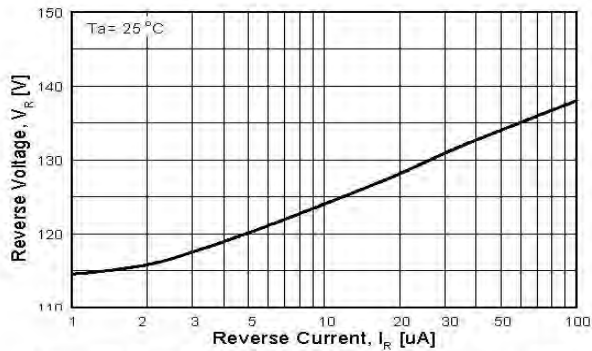


**Figure 1. Reverse Voltage vs Reverse Current  
BV - 1.0 to 100uA**

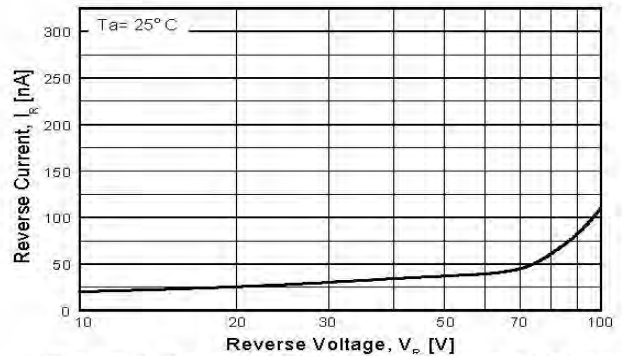


**Figure 2. Reverse Current vs Reverse Voltage  
IR - 10 to 100 V**

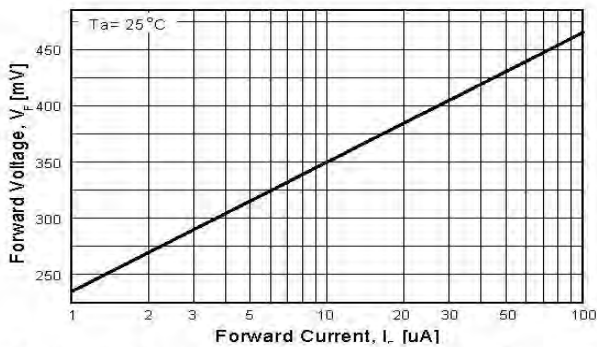


**Figure 3. Forward Voltage vs Forward Current  
VF - 1.0 to 100 uA**

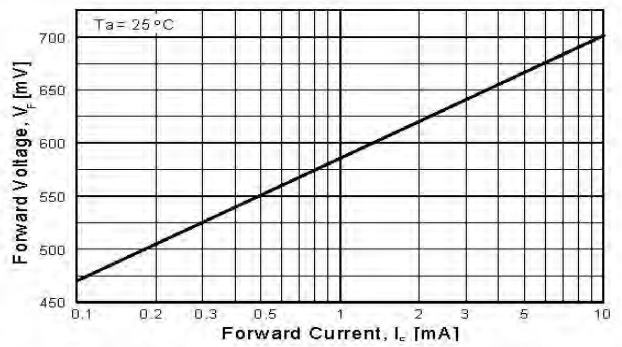


**Figure 4. Forward Voltage vs Forward Current  
VF - 0.1 to 10 mA**

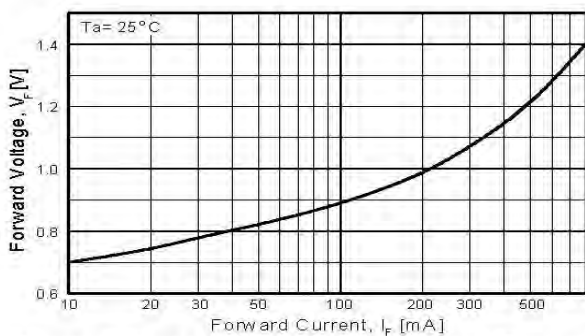


**Figure 5. Forward Voltage vs Forward Current  
VF - 10 - 800 mA**

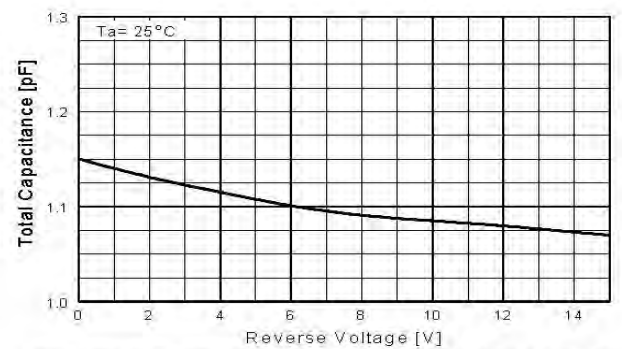

**Figure 6. Total Capacitance vs Reverse Voltage**

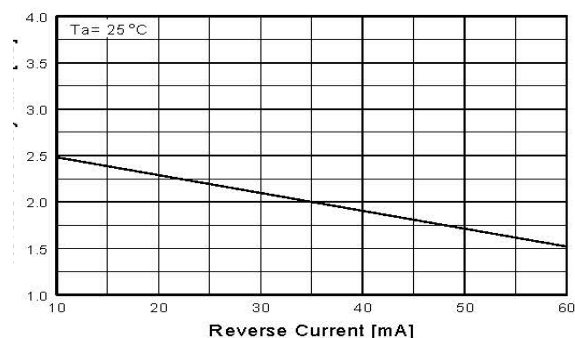

**Figure 7. Reverse Recovery Time  
vs Reverse Current  
TRR - IR 10 mA vs 60 mA**


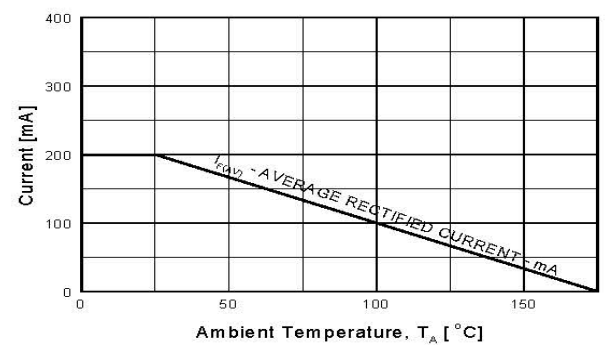


**Figure 8. Average Rectified Current ( $I_{F(AV)}$ )  
versus Ambient Temperature ( $T_A$ )**

**PACKAGE OUTLINE**

Plastic surface mounted package; 3 leads

SOT-23

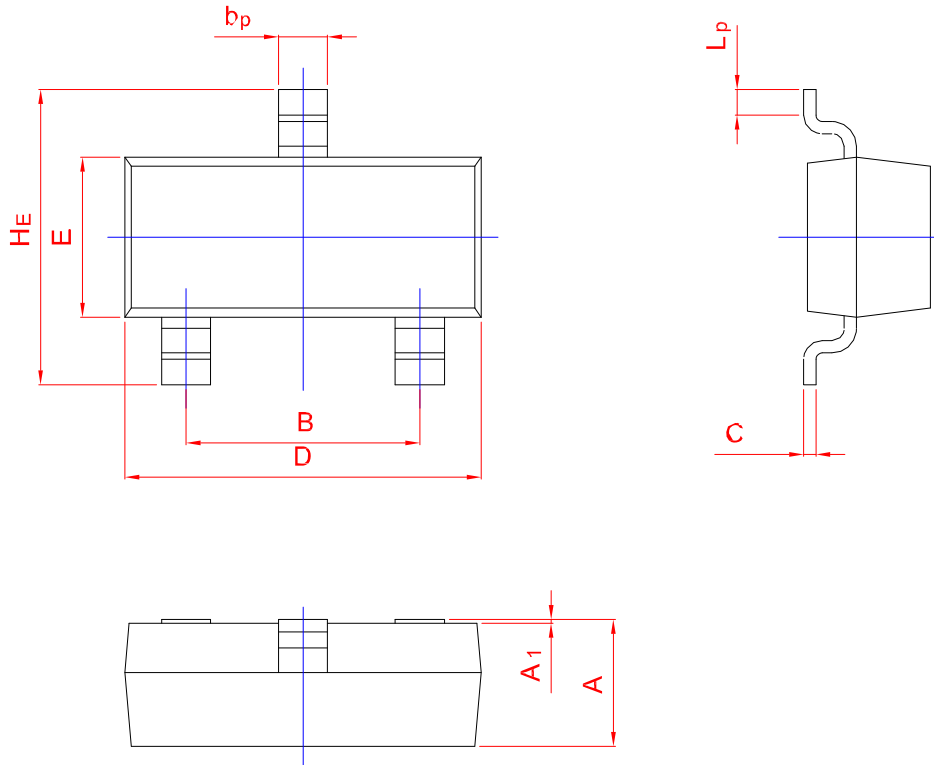

UNIT	A	B	b <sub>p</sub>	C	D	E	HE	A <sub>1</sub>	L <sub>p</sub>
mm	1.40	2.04	0.50	0.19	3.10	1.65	3.00	0.100	0.50
	0.95	1.78	0.35	0.08	2.70	1.20	2.20	0.013	0.20

**IMPORTANT NOTICE**

and **SXSEMI**<sup>®</sup> are registered trademarks of **SXSEMI Electronics Co., Ltd** (SXSEMI) , SXSEMI reserves the right to make changes without further notice to any products herein. SXSEMI makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SXSEMI assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in SXSEMI data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. SXSEMI does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.