



## Feature

- This device is Pb-Free, Halogen Free/BFR Free and Rohs compliant.

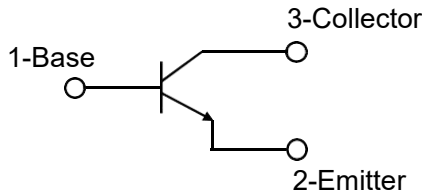

Circuit Diagram



Marking (Top View)

## Mechanical Characteristics

- DFN1006-3L without plating
- Mounting position: Any
- Qualified max reflow temperature:260°C
- Device meets MSL 1 requirements

## Absolute maximum rating@25°C

Parameter	Symbol	Value	Units
Collector-Base Voltage	$V_{CBO}$	60	V
Collector-Emitter Voltage	$V_{CEO}$	40	V
Emitter-Base Voltage	$V_{EBO}$	6	V
Collector Current -Continuous	$I_C$	200	mA
Collector Dissipation	$P_C$	100 <sup>①</sup>	mW
		590 <sup>②</sup>	
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	1250 <sup>①</sup>	°C/W
		212 <sup>②</sup>	
Junction Temperature	$T_J$	150	°C
Storage Temperature	$T_{STG}$	-55 ~ +150	°C

Notes:

- ①.Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.
- ②.Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for collector 1cm<sup>2</sup>.

Electrical characteristics per line@25°C

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 10\mu A, I_E = 0$	60	-	-	V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1mA, I_B = 0$	40	-	-	V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\mu A, I_C = 0$	6	-	-	V
Collector cut-off current	$I_{CBO}$	$V_{CB} = 60V, I_E = 0$	-	-	0.1	$\mu A$
Collector cut-off current	$I_{CEX}$	$V_{CE} = 30V, V_{BE(off)} = 3V$	-	-	50	nA
Emitter cut-off current	$I_{EBO}$	$V_{EB} = 5V, I_C = 0$	-	-	0.1	$\mu A$
DC current gain	$h_{FE}$	$V_{CE} = 1V, I_C = 10mA$	100	-	300	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 50mA, I_B = 5mA$	-	-	0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 50mA, I_B = 5mA$	-	-	0.95	V
Transition frequency	$f_T$	$V_{CE} = 20V, I_C = 10mA, f = 100MHz$	300	-	-	MHz
Delay time	$t_d$	$V_{CC} = 3V, V_{BE(off)} = 0.5V, I_C = 10mA, I_{B1} = 1mA$	-	-	35	ns
Rise time	$t_r$		-	-	35	ns
Storage time	$t_s$	$V_{CC} = 3V, I_C = 10mA, I_{B1} = I_{B2} = 1mA$	-	-	200	ns
Fall time	$t_f$		-	-	50	ns

Typical Characteristics

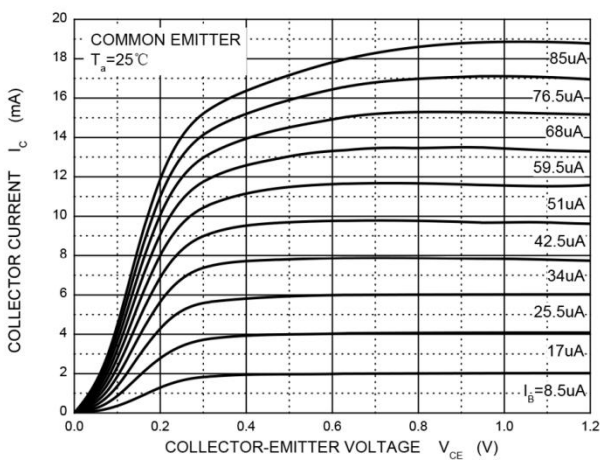


Fig 1. Static Characteristic

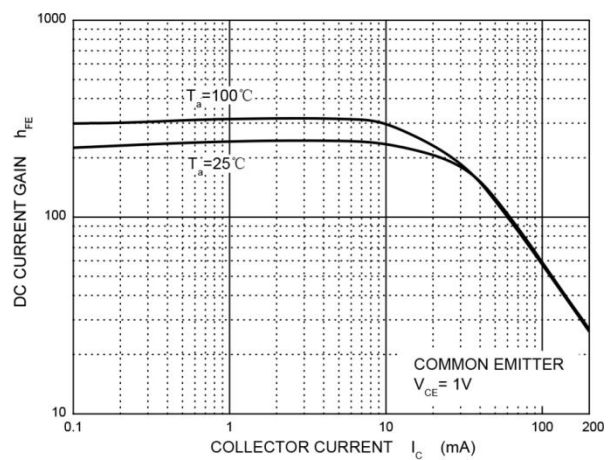


Fig 2.  $h_{FE}$  -----  $I_C$

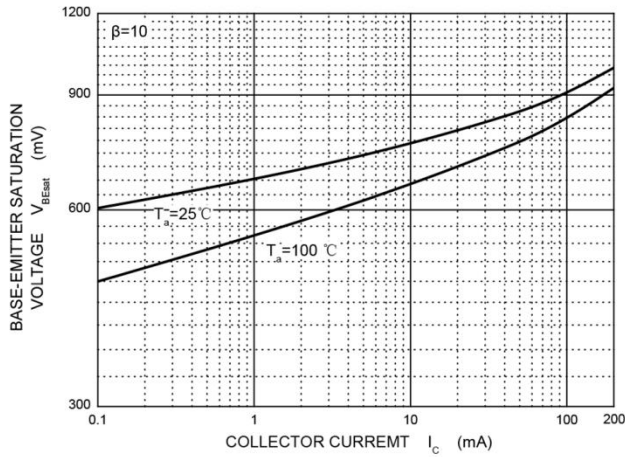


Fig 3.  $V_{BEsat}$  -----  $I_C$

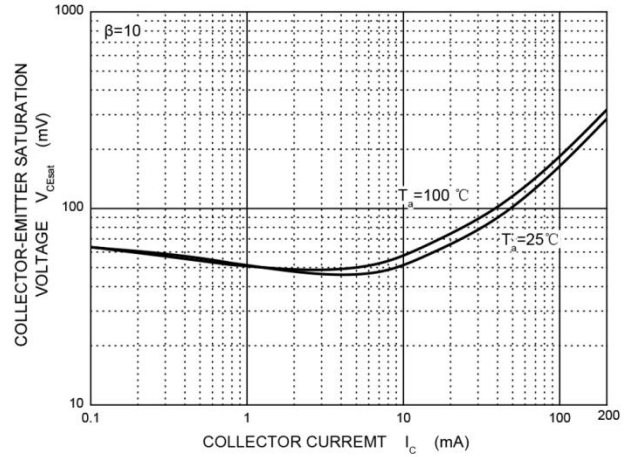


Fig 4.  $V_{CEsat}$  -----  $I_C$

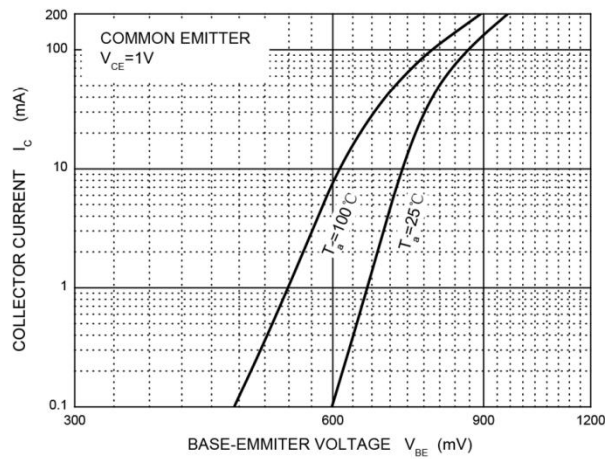


Fig 5.  $I_C$  -----  $V_{BE}$

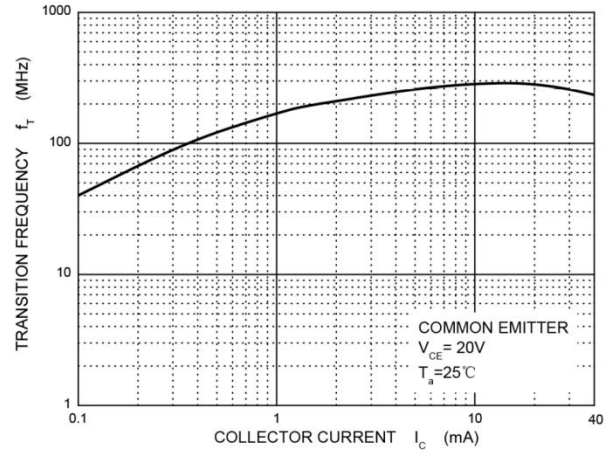


Fig 6.  $f_T$  -----  $I_C$

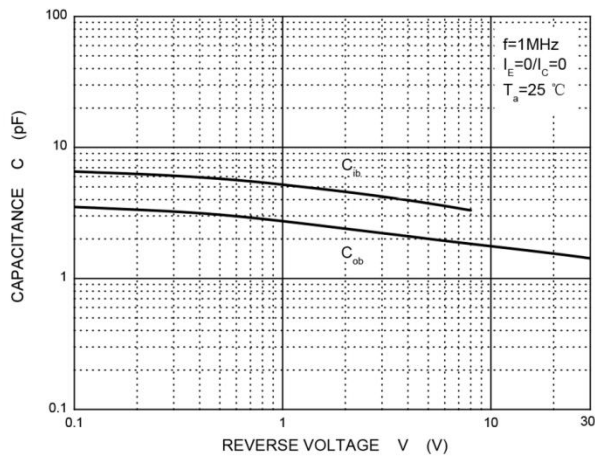


Fig 7.  $C_{ob}/C_{ib}$  -----  $V_{CB}/V_{EB}$


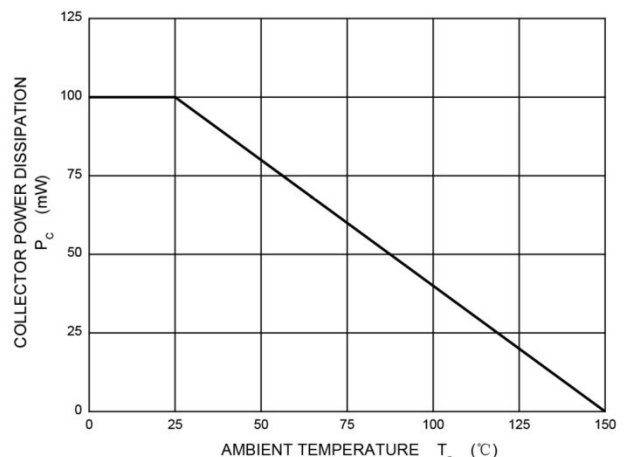


Fig 8.  $P_C$  -----  $T_a$


### Solder Reflow Recommendation

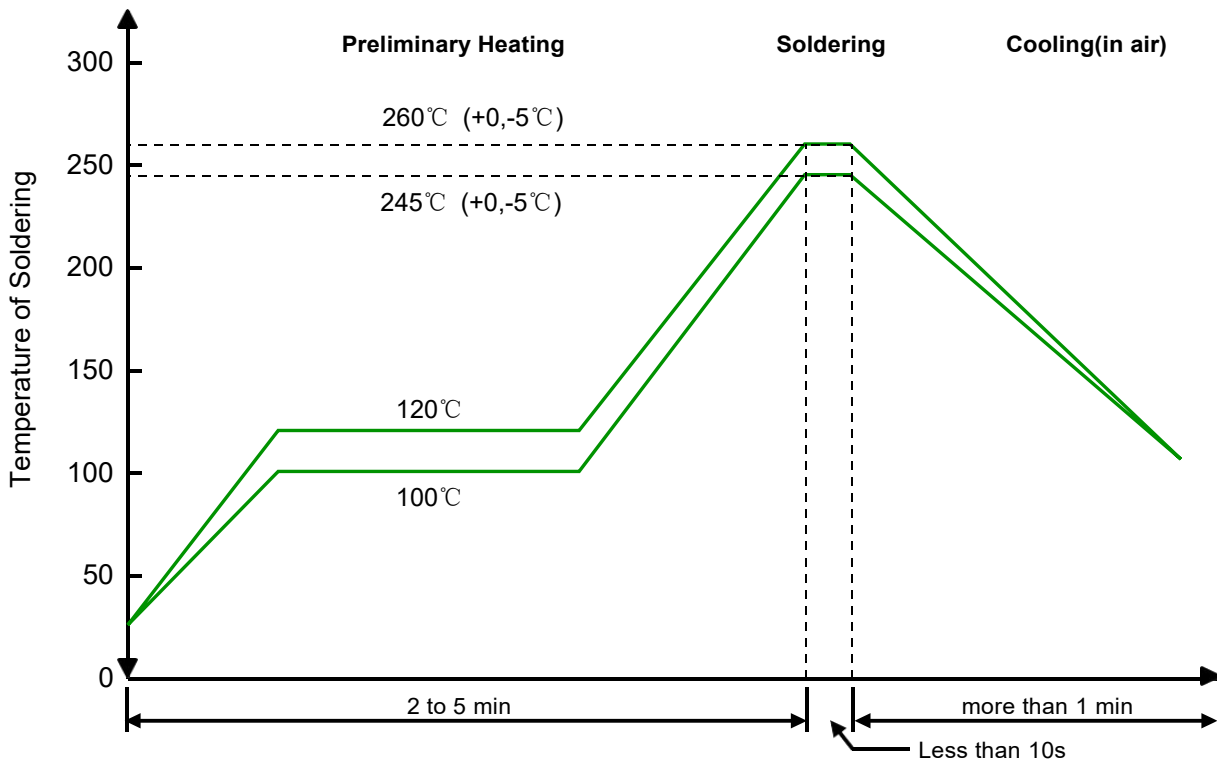


Remark: Pb free for 260°C; Pb for 245°C.

### Product dimension (DFN1006-3L)

PIN 1 DOT BY MARKN

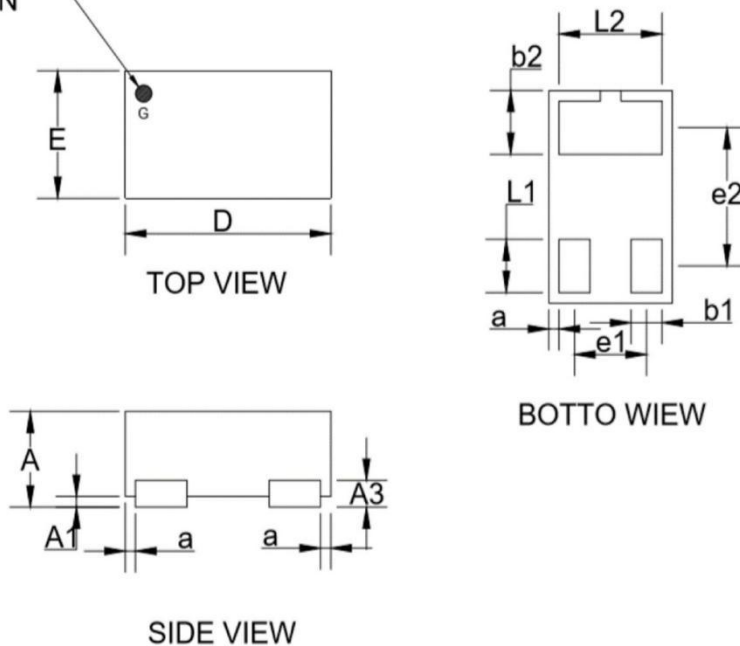

Dim	Millimeters		
	Min	Nom	Max
A	0.40	-	0.50
A1	0.00	-	0.05
A3	0.125 Ref.		
D	0.95	1.00	1.05
E	0.55	0.60	0.65
b1	0.10	0.15	0.20
b2	0.20	0.25	0.30
L1	0.20	0.25	0.30
L2	0.40	0.50	0.60
a	-	-	0.05
e1	0.35 BSC		
e2	0.65 BSC		

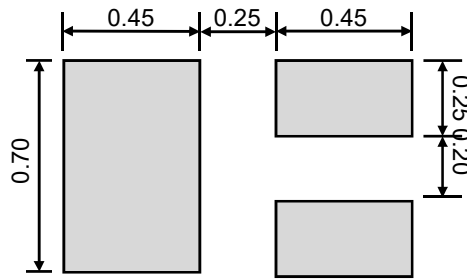


Suggested PCB Layout

Unit:mm

### Ordering information

Device	Package	Reel	Shipping
TAPING	DFN1006-3L (Pb-Free)	7"	10000 / Tape & Reel

### Load with information

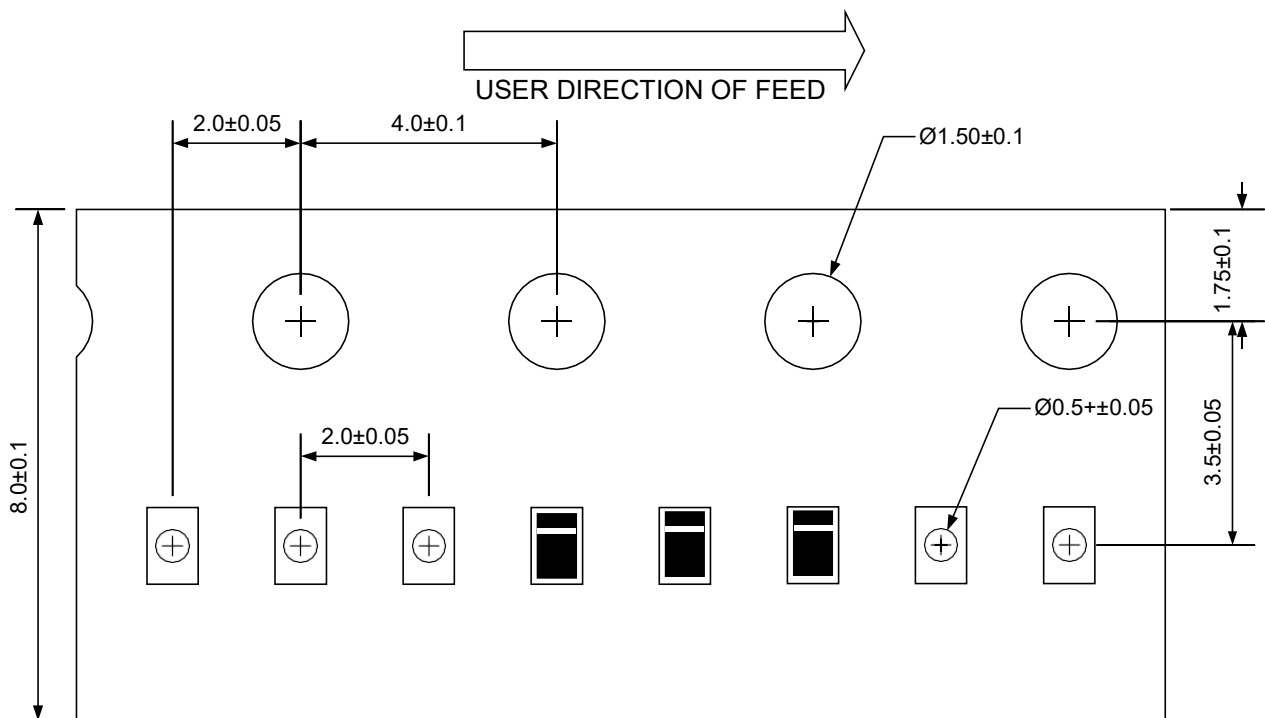

Unit:mm

**IMPORTANT NOTICE**

and **SXSEMI**<sup>®</sup> are registered trademarks of **SXSEMI Electronics Co., Ltd** (SXSEMI), SXSEMI reserves the right to make changes without further notice to any products herein. SXSEMI makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SXSEMI assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SXSEMI data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SXSEMI does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.