

FEATURES

- | Small Power Mold Type
- | Low I_R
- | High Reliability

SOD-123



MARKING: 76

Maximum Ratings @Ta=25 °C


Parameter	Symbol	Limit	Unit
DC reverse voltage	V_R	60	V
Mean rectifying current	I_o	1	A
Peak forward surge current @t=8.3ms	I_{FSM}	15	A
power dissipation	P_D	350	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	286	°C/W
Operating Junction Temperature Range	T_j	-40 ~ +125	°C
Storage Temperature Range	T_{stg}	-55 ~ +150	°C

Electrical characteristics @Ta=25 °C


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V_F			0.58	V	$I_F=1A$
Reverse current	I_R			30	μA	$V_R=60V$

Typical Characteristics


Forward Characteristics

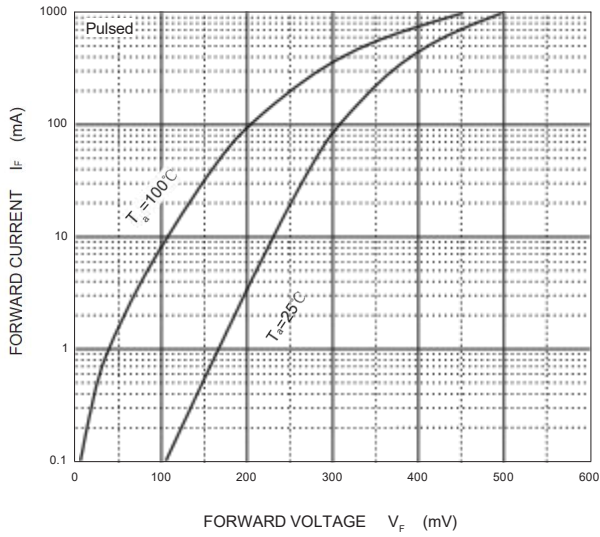


Reverse Characteristics

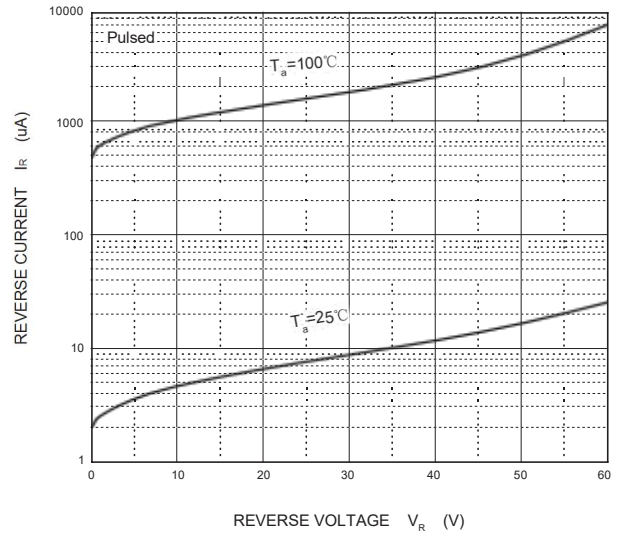


Capacitance Characteristics

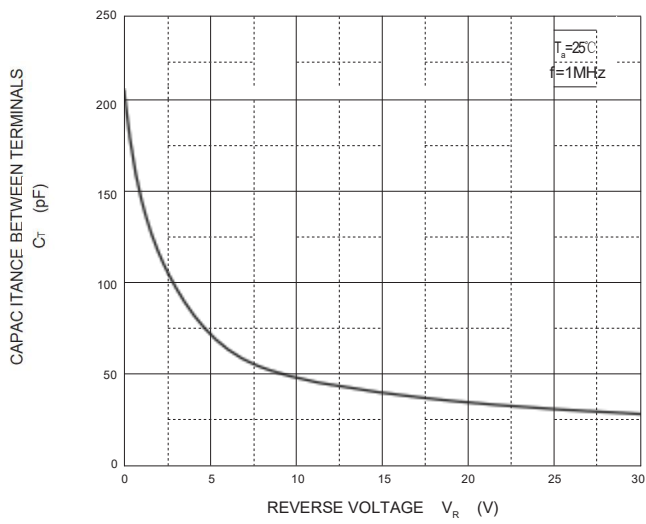

Power Derating Curve

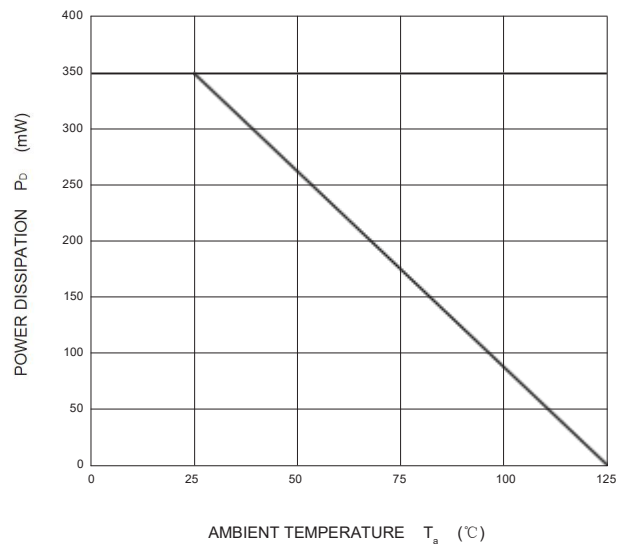


SOD-123 Package Outline Dimensions

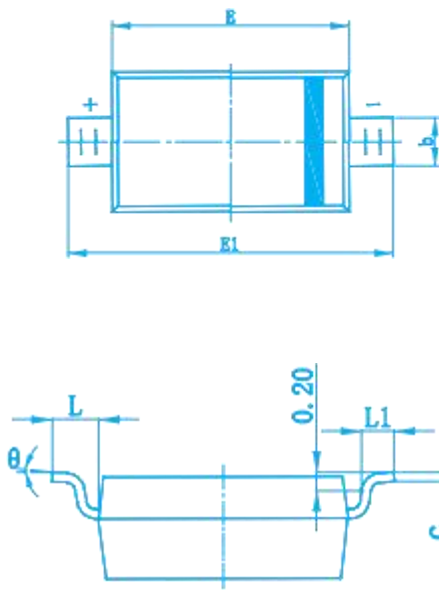

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.450	0.650	0.018	0.026
c	0.080	0.150	0.003	0.006
D	1.500	1.700	0.059	0.067
E	2.600	2.800	0.102	0.110
E1	3.550	3.850	0.140	0.152
L	0.500 REF		0.020 REF	
L1	0.250	0.450	0.010	0.018
θ	0°	8°	0°	8°

SOD-123 Suggested Pad Layout

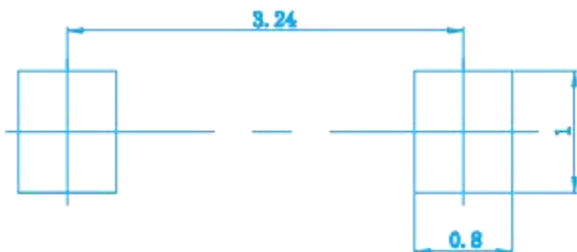

Note:
 1. Controlling dimension: in millimeters.
 2. General tolerance: ± 0.05mm.
 3. The pad layout is for reference purposes only.